





PLAN VIEW

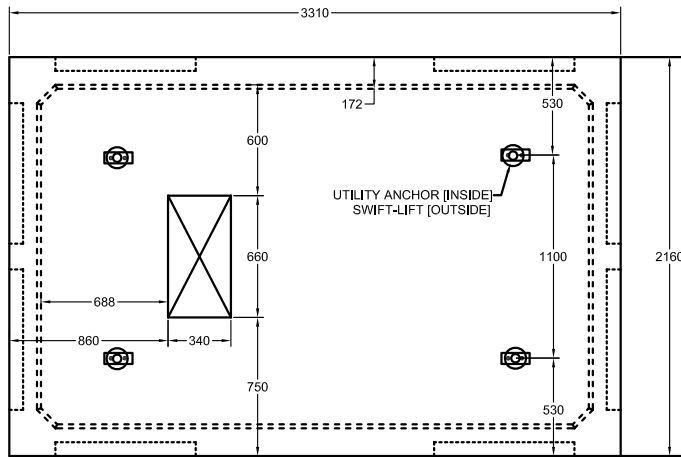



**NOTES:**

- ▣ Blockouts: 8 - 760x594x75 mm
- ▣ Concrete Strength: 30 MPa [min.] Air Entrained [5 - 8%]
- ▣ Wall Thickness: 150 mm [min.]
- ▣ 4 - Utility Anchors Outside for Lifting (no sp. rigging req'd)
- ▣ 4 - Utility Anchors Inside [Used as Pulling Eyes]
- ▣ 1 - 340x660mm Opening at Top
- ▣ Heavily Reinforced with 10M & 15M Bars
- ▣ 16 - 13mm Racking Inserts on Inside Walls
- ▣ Total Weight: 6,222kg [17,068 lbs.]

SIDE PROFILE VIEW

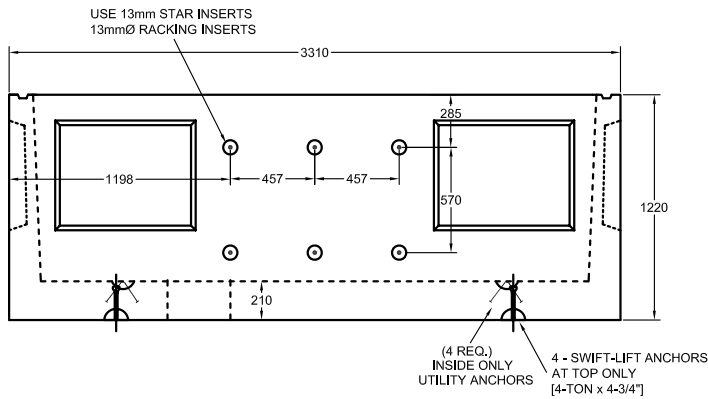

END PROFILE VIEW

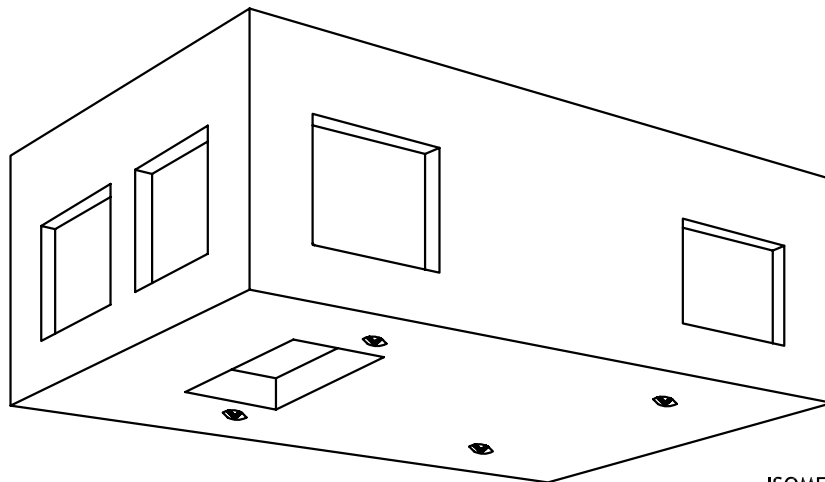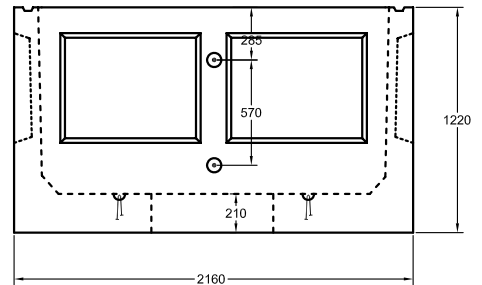

ISOMETRIC VIEW

Hy-Grade Precast Concrete  
2411 First Street Louth  
St. Catharines, Ontario, L2R 6P7  
Tel: 1-800-229-8568  
Fax: 905-684-8560



Hy-Grade Precast Concrete Products, Inc.  
PO Box 148  
South Byron, New York, USA 14557  
Tel: 1-877-897-2730  
Fax: 585-548-2731