HY-GRADE
PRECAST CONCRETE

BURLINGTON HYDRO
HB-512-D BOTTOM [BHI 37-330B1]

PLAN VIEW

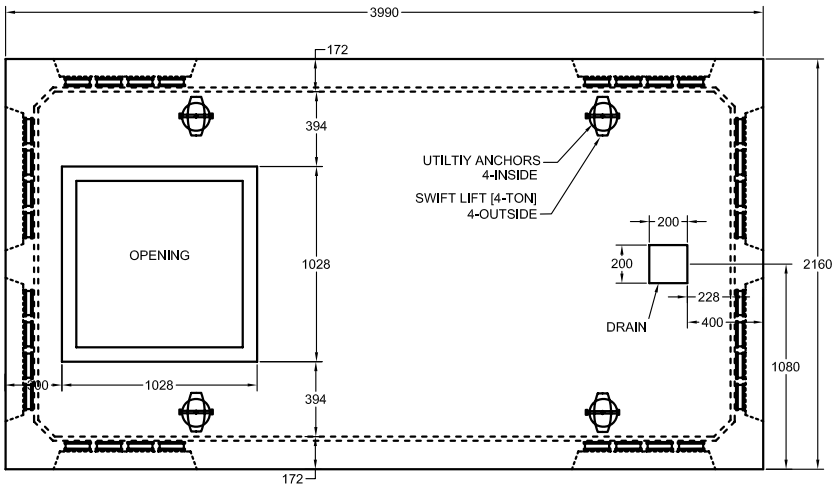

NOTES:

- 96 - 4"Ø Polylock Pipe Seals
- Concrete Strength: 30 MPa [min.] Air Entrained [5 - 8%]
- Wall Thickness: 150 mm [min.]
- 4 - Utility Anchors Outside for Lifting (no sp. rigging req'd)
- 4 - Utility Anchors Inside [Used as Pulling Eyes]
- 1 - 460x460mm Opening at Top
- Heavily Reinforced with 10M & 15M Bars
- 24 - 13mm Racking Inserts on Inside Walls
- 32 - 4"Ø Polylock Pipe Seal
- Total Weight: 7,758kg [17,068 lbs.]

SIDE PROFILE VIEW

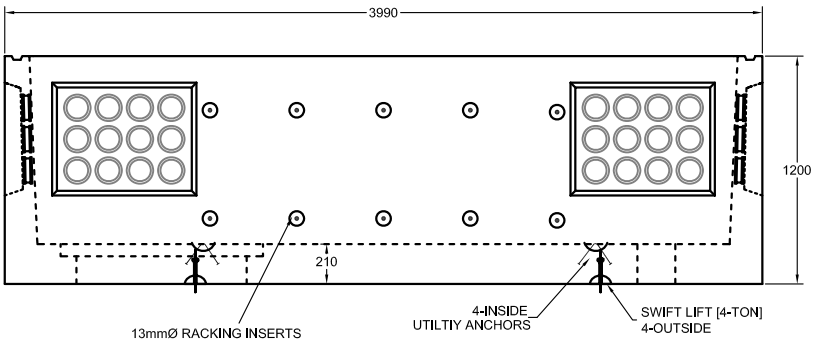

END PROFILE VIEW

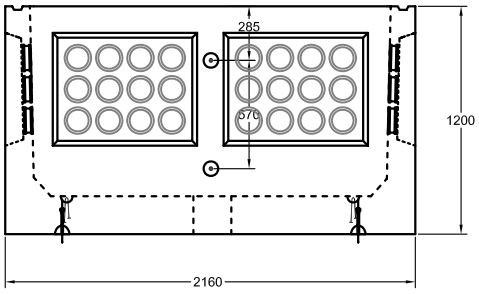

THIS VAULT HAS NO SWITCH GEAR IT IS USED SIMPLY AS A PULLING PIT

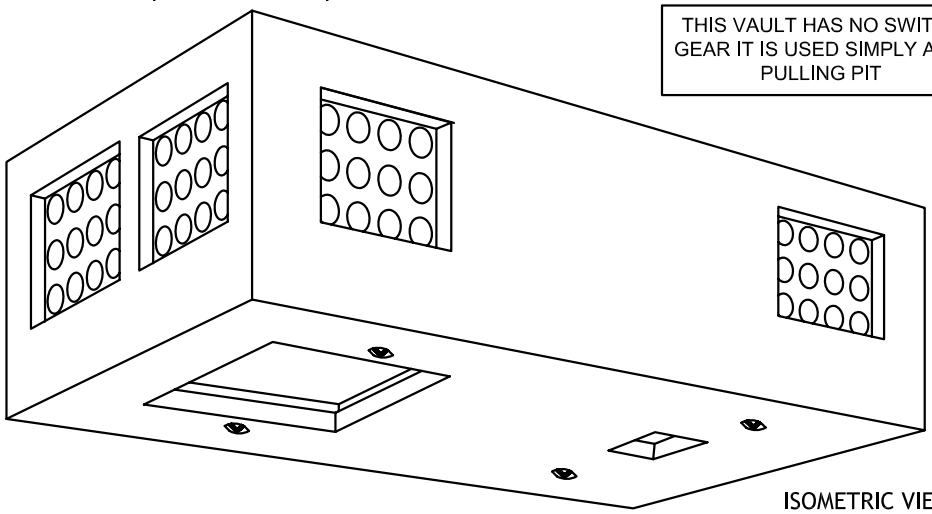

ISOMETRIC VIEW

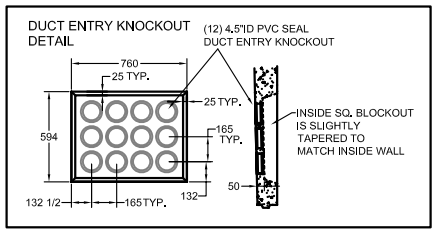

Hy-Grade Precast Concrete
2411 First Street Louth
St. Catharines, Ontario, L2R 6P7
Tel: 1-800-229-8568
Fax: 905-684-8560

Hy-Grade Precast Concrete Products, Inc.
PO Box 148
South Byron, New York, USA 14557
Tel: 1-877-897-2730
Fax: 585-548-2731